

ABSEL

PREMIUM BATTERIES



2025



EXPLORE THE WORLD OF NEW ENERGY

TOP QUALITY



GUARANTEED

Premium Automotive Batteries


TOP QUALITY GUARANTEED

Delivering reliable power and premium durability, ABSEL batteries boast high vibration resistance, superior longevity, and a defect rate below 0.1%. Choose from a comprehensive selection of over 200 models, compatible with DIN/JIS standards and featuring the latest battery technologies.




OUTSTANDING PERFORMANCE

- **High Vibration and Shock Resistance**
Built to withstand harsh driving conditions, ensuring stable performance and durability.
- **Enhanced Cold Cranking Power**
Delivers outstanding starting power even in extreme weather conditions.
- **Consistent Power Output**
Provides stable voltage and optimal energy flow for modern vehicles with high electrical demands.
- **Maintenance-Free Design**
Sealed and maintenance-free design for hassle-free use.



EXCEPTIONAL QUALITY AND RELIABILITY

- **Manufactured to the Highest Standards**
Produced at industry-leading factories certified to IATF 16949 and trusted by OEM automakers, our products guarantee exceptional quality and reliability.
- **Ultra-Low Defect Rate**
Defect rate is below 0.1%
- **Strict Quality Control**
Each battery undergoes rigorous multi-stage testing to guarantee premium quality and safety.
- **Superior Longevity**
Designed with advanced materials and technology to provide a longer lifespan.



WIDE PRODUCT RANGE


- More than 280 references for PC, LCV and CV
- 100% ASIA / EURO compatible boxes
- AGM / EFB / SLI / ADVANCED SLI technologies



Premium Automotive Batteries

BATTERY AT ITS BEST: EFFICIENCY, RELIABILITY, ENDURANCE!

ABSEL batteries deliver top-tier performance with maximum efficiency, minimal water consumption, and low self-discharge rates. Engineered for superior vibration resistance and unmatched endurance, they ensure long-lasting reliability even in the toughest conditions. Choose ABSEL for power that goes the distance.

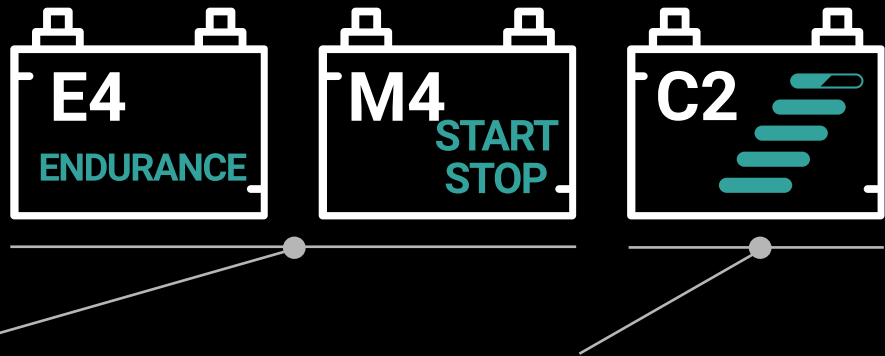

ENDURANCE

Battery's ability to handle charge-discharge cycles.


E1-E4 (Lead-Acid) / M1-M4 (EFB & AGM):

- E1/M1: Basic endurance; for low-use devices.
- E2/M2: Moderate endurance; for medium-use equipment.
- E3/M3: High endurance; for professional gear and frequent use.
- E4/M4: Maximum endurance; for industrial use and continuous operation.

SELF-DISCHARGE

Rate at which the battery loses charge when idle.

- C1: High self-discharge; loses charge faster, less ideal for long storage (Traditional lead-acid battery).
- C2: Low self-discharge; retains charge longer, ideal for frequent use (Premium technology battery).

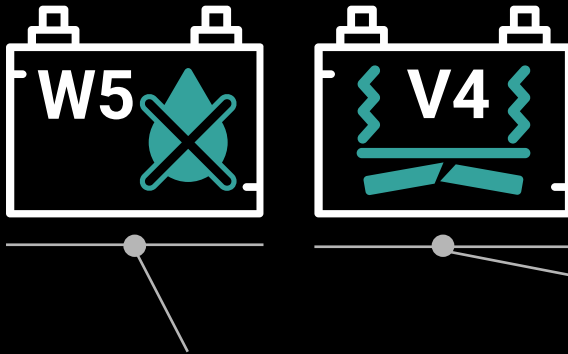

WATER CONSUMPTION

Indicates battery water usage. Higher numbers mean lower consumption.

- W1: Highest water consumption; frequent maintenance needed (Traditional lead-acid battery).
- W5: Lowest water consumption; often maintenance-free (Premium technology battery).

VIBRATION RESISTANCE

Battery's ability to withstand vibrations.

- V1: For regular vehicles; basic vibration protection.
- V2: For SUVs/commercial vehicles; moderate resistance.
- V3: For buses/trucks; high vibration protection.
- V4: For heavy-duty machinery; maximum vibration resistance.

Premium Automotive Batteries

PUNCH TECHNOLOGY IN ABSEL BATTERIES: POWER, RELIABILITY, DURABILITY

PUNCH technology is an advanced method of stamping lead grids for the positive plates in automotive batteries. It involves mechanically punching the grids from a solid sheet of alloy under high pressure, while maintaining the integrity of the frame.

MECHANICAL STRENGTH

The solid frame design and secure fixation of the active material make the grids highly resistant to vibration and mechanical stress.

CORROSION RESISTANCE

Lead-calcium alloys with uniformly distributed alloying elements provide effective protection against spot corrosion.

ELECTRICAL CHARACTERISTICS

Grids with low internal resistance ensure excellent conductivity and reliable cold-start capability, even in freezing temperatures.

DESIGN RELIABILITY

Smooth edges, short-circuit protection, and geometric stability enhance safety and structural durability.

OPERATING CHARACTERISTICS

PUNCH technology reduces self-discharge, improves resistance to deep discharges, and extends battery lifespan.

TECHNOLOGICAL ADVANTAGES

Precision engineering and end-to-end quality assurance enable seamless production automation and guarantee consistent product performance.

The grid material offers long-lasting capacity retention, high thermal resistance, effective sulfation protection, and reduced active material loss.

All ABSEL batteries are manufactured using PUNCH grid technology and are most effective for:



Start-Stop systems



Extreme climate conditions



Vehicles with high energy demands



Frequent starts and urban driving



ABSEL batteries with PUNCH technology offer a perfect balance of performance, service life, and reliability. This technology sets new standards in manufacturing, especially in light of today's increasing demands for energy efficiency and reliability.

Premium Automotive Batteries

WARRANTY UP TO 24 MONTHS

The warranty period for batteries installed in passenger vehicles is 24 months, and for trucks and commercial vehicles: 12 months.



24 months
when installed
on passenger vehicles

12 months
when installed on LCV
and HD vehicles



Premium Automotive Batteries

PREMIUM PACKAGING THAT WORKS FOR EVERYONE

Each battery is packed into full-color carton boxes with clear specs

• FOR SERVICE STATIONS

Easy identification and selection of the right battery, saving time during installation.

• FOR DISTRIBUTORS

Streamlined inventory management with visible specs and professional presentation for bulk handling.

• FOR RETAIL STORES

Eye-catching design attracts customers, while clear specifications simplify the sales process.

• FOR END CUSTOMERS

Quick understanding of product features, ensuring confidence in their purchase and easy future reference.



TOP QUALITY



GUARANTEED



Premium Automotive Batteries For PC and LCV

PLATINUM AGM

POWER EFB

SELECTION EVO

SELECTION



TOP QUALITY



GUARANTEED

ABSEL PLATINUM AGM

Built for Start-Stop Systems, Delivering 40% Extra Power.


ABSEL PLATINUM AGM batteries are specifically designed to handle frequent cycles and increased energy demands typical of Start-Stop systems and regenerative braking. Their performance exceeds that of conventional batteries by 40%.




4x Extended Lifespan and Rechargeability



Advanced Absorbent Glass Mat technology




High Performance Over a Wide Temperature Range



40% Enhanced Performance Over Conventional Batteries



Safe & Maintenance-free VRLA Design



Increased Vibration Resistance



EURO: L0 - L6
ASIA: B21, B24, G31


ABSEL PLATINUM AGM AUX

Reliable Backup Power for High-Energy Automotive Systems.

ABSEL PLATINUM AUX AGM auxiliary batteries support high-energy automotive accessories and provide reliable backup power under heavy electrical loads. Designed for dual-battery systems, they improve Start-Stop efficiency, extend battery life, and ensure smooth operation of entertainment, navigation, and climate control systems.



4x Extended Lifespan and Rechargeability




40% Enhanced Performance Over Conventional Batteries



Advanced Absorbent Glass Mat technology



Safe & Maintenance-free VRLA Design



High Performance Over a Wide Temperature Range



Increased Vibration Resistance

ABSEL

PREMIUM BATTERIES



EURO: C56

TOP QUALITY



GUARANTEED

ABSEL POWER EFB

Reliable Performance for Entry-Level Start-Stop Systems.


is engineered for entry-level Start-Stop systems, offering exceptional power and efficiency. Its increased durability and longer lifespan make it the perfect solution for vehicles with high energy demands, delivering 30% better performance than standard batteries.



Reliable PUNCH Technology: 2.5x
Extended Lifespan and Rechargeability



Enhanced Flooded Calcium (Ca) Alloy Grid
Technology



High Performance Over a Wide
Temperature Range



30% Enhanced Performance Over Conventional
Batteries



Safe &
Maintenance-free VRLA Design



Increased Vibration Resistance



START
STOP



EURO: L1 - L6, LB3, LB4
ASIA: B24, D23, D26, D31

ABSEL SELECTION EVO

Maximum Starting Current in SLI Technology

ABSEL SELECTION EVO batteries, featuring advanced SLI technology, are equipped with positive grids manufactured using PUNCH technology from a calcium alloy (Ca). This ensures instant engine start and reliable power supply at any time. Their performance is up to 25% higher compared to conventional batteries.



Maximum Starting Current in SLI Technology




25% Enhanced Performance Over Conventional Batteries



Advanced Calcium (Ca) Alloy Grid Technology



Safe & Maintenance-free Design



High Performance Over a Wide Temperature Range



Increased Vibration Resistance



EURO: L0 - L6, LB1 - LB5
ASIA: B19, B20, B24, D23,
D26, D31, G31

ABSEL SELECTION

Premium Performance, Affordable Power.


ABSEL SELECTION batteries, utilizing reliable SLI technology, feature a cutting-edge calcium (Ca) alloy grid, ensuring instant engine start and reliable power supply at any time. Their performance is 25% higher than that of traditional batteries.



25% Enhanced Performance Over
Conventional Batteries



Advanced Calcium (Ca) Alloy Grid
Technology



High Performance Over a Wide
Temperature Range



Safe &
Maintenance-free Design



Increased Vibration Resistance



EURO: L0 - L6, LB1 - LB5
ASIA: B19, B20, B24, D23,
D26, D31, G31



Premium Automotive Batteries For HD, AGRI and Construction

PLATINUM AGM HD

POWER EFB HD

SELECTION EVO HD



TOP QUALITY



GUARANTEED

Premium Automotive Batteries

ADVANCED BATTERY SOLUTIONS FOR HEAVY-DUTY VEHICLES

ABSEL offers advanced battery solutions for heavy-duty vehicles, combining power, durability, and cutting-edge technology.



ABSEL PLATINUM AGM

ABSEL PLATINUM AGM HD batteries are specifically designed for Start-Stop systems and regenerative braking, delivering 40% more performance and up to 4 times the lifespan compared to conventional batteries. The Absorbent Glass Mat (AGM) technology ensures superior vibration resistance and reliable performance across a wide temperature range.

D5, D6






D5, D6



ABSEL POWER EFB HD

ABSEL POWER EFB HD provides a reliable and affordable solution for entry-level Start-Stop systems. Featuring PUNCH Technology and enhanced calcium alloy grids, these batteries offer 2.5 times longer lifespan and 30% better performance, making them a cost-effective choice for high-energy-demand vehicles.

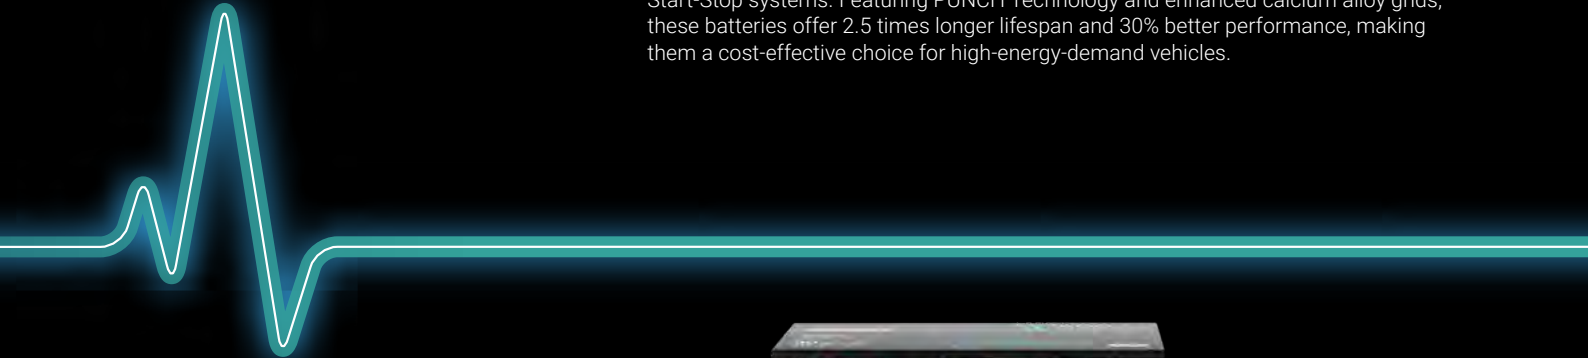

D4, D5, D6, E41



ABSEL SELECTION EVO HD

ABSEL SELECTION HD EVO, powered by advanced SLI technology, delivers maximum starting current for fast and reliable engine ignition, exceptional cold-weather performance, and 25% higher efficiency than standard batteries.

| Type case | Code | Standard case | Voltage, V | Capacity (Ah) | CCA (EN), A | Layout | Terminal | Hold Down | Length (mm) | Width (mm) | Height (mm) | Total Height (mm) | Weight, kg |
|-----------|------|---------------|------------|---------------|-------------|--------|----------|-----------|-------------|------------|-------------|-------------------|------------|
|-----------|------|---------------|------------|---------------|-------------|--------|----------|-----------|-------------|------------|-------------|-------------------|------------|

PLATINUM AUX AGM

| | | | | | | | | | | | | | |
|-----|------------------|------|----|----|-----|---|----|-----|-----|----|-----|-----|-----|
| C56 | QA 012 020 H56 C | EURO | 12 | 12 | 200 | 1 | M6 | B00 | 151 | 88 | 146 | 146 | 5,0 |
|-----|------------------|------|----|----|-----|---|----|-----|-----|----|-----|-----|-----|

PLATINUM AGM

| | | | | | | | | | | | | | |
|-----|------------------|------|----|-----|-----|---|----|-----|-----|-----|-----|-----|------|
| L0 | QA 040 042 A10 A | EURO | 12 | 40 | 420 | 0 | 1 | B13 | 175 | 175 | 190 | 190 | 12,1 |
| L1 | QA 050 054 A11 A | EURO | 12 | 50 | 540 | 0 | 1 | B13 | 207 | 175 | 190 | 190 | 15,2 |
| L2 | QA 060 064 A12 A | EURO | 12 | 60 | 640 | 0 | 1 | B13 | 242 | 175 | 190 | 190 | 17,2 |
| | QA 060 066 A12 A | EURO | 12 | 60 | 660 | 0 | 1 | B13 | 242 | 175 | 190 | 190 | 17,6 |
| | QA 060 068 A12 A | EURO | 12 | 60 | 680 | 0 | 1 | B13 | 242 | 175 | 190 | 190 | 18,0 |
| L3 | QA 070 072 A13 A | EURO | 12 | 70 | 720 | 0 | 1 | B13 | 278 | 175 | 190 | 190 | 20,0 |
| | QA 070 074 A13 A | EURO | 12 | 70 | 740 | 0 | 1 | B13 | 278 | 175 | 190 | 190 | 20,0 |
| | QA 070 076 A13 A | EURO | 12 | 70 | 760 | 0 | 1 | B13 | 278 | 175 | 190 | 190 | 20,5 |
| L4 | QA 080 080 A14 A | EURO | 12 | 80 | 800 | 0 | 1 | B13 | 315 | 175 | 190 | 190 | 23,5 |
| L5 | QA 092 085 A15 A | EURO | 12 | 92 | 850 | 0 | 1 | B13 | 353 | 175 | 190 | 190 | 26,2 |
| | QA 095 085 A15 A | EURO | 12 | 95 | 850 | 0 | 1 | B13 | 353 | 175 | 190 | 190 | 26,2 |
| | QA 095 090 A15 A | EURO | 12 | 95 | 900 | 0 | 1 | B13 | 353 | 175 | 190 | 190 | 26,2 |
| L6 | QA 105 095 A16 A | EURO | 12 | 105 | 950 | 0 | 1 | B13 | 394 | 175 | 190 | 190 | 30,0 |
| B21 | QA 040 033 A21 B | ASIA | 12 | 40 | 330 | 0 | 1 | B01 | 203 | 136 | 200 | 222 | 11,2 |
| | QA 040 033 B21 B | ASIA | 12 | 40 | 330 | 1 | 1 | B01 | 203 | 136 | 200 | 222 | 11,2 |
| B24 | QA 045 040 A24 B | ASIA | 12 | 45 | 400 | 0 | 1 | B01 | 237 | 128 | 199 | 220 | 12,9 |
| | QA 045 040 B24 B | ASIA | 12 | 45 | 400 | 1 | 1 | B01 | 237 | 128 | 199 | 220 | 12,9 |
| G31 | QA 090 085 J93 B | ASIA | 12 | 90 | 850 | 7 | 13 | B01 | 330 | 173 | 218 | 234 | 26,2 |

PLATINUM AGM HD

| | | | | | | | | | | | | | |
|----|------------------|------|----|-----|-------|---|---|-----|-----|-----|-----|-----|------|
| D5 | QA 180 110 A05 C | EURO | 12 | 180 | 1 100 | 3 | 1 | B00 | 504 | 220 | 195 | 215 | 50,0 |
| | QA 180 110 B05 C | EURO | 12 | 180 | 1 100 | 4 | 1 | B00 | 504 | 220 | 195 | 215 | 50,0 |
| | QA 200 120 A05 C | EURO | 12 | 200 | 1 200 | 3 | 1 | B00 | 504 | 220 | 195 | 215 | 51,0 |
| | QA 200 120 B05 C | EURO | 12 | 200 | 1 200 | 4 | 1 | B00 | 504 | 220 | 195 | 215 | 51,0 |

| Type case | Code | Standard case | Voltage, V | Capacity (Ah) | CCA (EN), A | Layout | Terminal | Hold Down | Length (mm) | Width (mm) | Height (mm) | Total Height (mm) | Weight, kg |
|-----------|------------------|---------------|------------|---------------|-------------|--------|----------|-----------|-------------|------------|-------------|-------------------|------------|
| D6 | QA 225 120 A06 C | EURO | 12 | 225 | 1 200 | 3 | 1 | B00 | 516 | 275 | 217 | 237 | 64,0 |
| | QA 225 120 B06 C | EURO | 12 | 225 | 1 200 | 4 | 1 | B00 | 516 | 275 | 217 | 237 | 64,0 |
| | QA 225 130 A06 C | EURO | 12 | 225 | 1 300 | 3 | 1 | B00 | 516 | 275 | 217 | 237 | 66,0 |
| | QA 225 130 B06 C | EURO | 12 | 225 | 1 300 | 4 | 1 | B00 | 516 | 275 | 217 | 237 | 66,0 |
| | QA 240 130 A06 C | EURO | 12 | 240 | 1 300 | 3 | 1 | B00 | 516 | 275 | 217 | 237 | 66,0 |
| | QA 240 130 B06 C | EURO | 12 | 240 | 1 300 | 4 | 1 | B00 | 516 | 275 | 217 | 237 | 66,0 |

POWER EFB

| | | | | | | | | | | | | | |
|----|------------------|------|----|-----|-----|---|---|-----|-----|-----|-----|-----|------|
| L1 | QE 050 054 A11 A | EURO | 12 | 50 | 540 | 0 | 1 | B13 | 207 | 175 | 190 | 190 | 15,2 |
| | QE 050 054 B11 A | EURO | 12 | 50 | 540 | 1 | 1 | B13 | 207 | 175 | 190 | 190 | 15,2 |
| | QE 055 056 A11 A | EURO | 12 | 55 | 560 | 0 | 1 | B13 | 207 | 175 | 190 | 190 | 15,4 |
| | QE 055 056 B11 A | EURO | 12 | 55 | 560 | 1 | 1 | B13 | 207 | 175 | 190 | 190 | 15,4 |
| L2 | QE 060 058 A12 A | EURO | 12 | 60 | 580 | 0 | 1 | B13 | 242 | 175 | 190 | 190 | 17,4 |
| | QE 060 058 B12 A | EURO | 12 | 60 | 580 | 1 | 1 | B13 | 242 | 175 | 190 | 190 | 17,4 |
| | QE 060 064 A12 A | EURO | 12 | 60 | 640 | 0 | 1 | B13 | 242 | 175 | 190 | 190 | 17,5 |
| | QE 060 064 B12 A | EURO | 12 | 60 | 640 | 1 | 1 | B13 | 242 | 175 | 190 | 190 | 17,5 |
| | QE 065 068 A12 A | EURO | 12 | 65 | 680 | 0 | 1 | B13 | 242 | 175 | 190 | 190 | 18,0 |
| | QE 065 068 B12 A | EURO | 12 | 65 | 680 | 1 | 1 | B13 | 242 | 175 | 190 | 190 | 18,0 |
| L3 | QE 070 070 A13 A | EURO | 12 | 70 | 700 | 0 | 1 | B13 | 278 | 175 | 190 | 190 | 20,3 |
| | QE 070 070 B13 A | EURO | 12 | 70 | 700 | 1 | 1 | B13 | 278 | 175 | 190 | 190 | 20,3 |
| | QE 075 075 A13 A | EURO | 12 | 75 | 750 | 0 | 1 | B13 | 278 | 175 | 190 | 190 | 20,5 |
| | QE 075 075 B13 A | EURO | 12 | 75 | 750 | 1 | 1 | B13 | 278 | 175 | 190 | 190 | 20,5 |
| L4 | QE 080 075 A14 A | EURO | 12 | 80 | 750 | 0 | 1 | B13 | 315 | 175 | 190 | 190 | 22,9 |
| | QE 080 075 B14 A | EURO | 12 | 80 | 750 | 1 | 1 | B13 | 315 | 175 | 190 | 190 | 22,9 |
| | QE 085 080 A14 A | EURO | 12 | 85 | 800 | 0 | 1 | B13 | 315 | 175 | 190 | 190 | 23,0 |
| | QE 085 080 B14 A | EURO | 12 | 85 | 800 | 1 | 1 | B13 | 315 | 175 | 190 | 190 | 23,0 |
| L5 | QE 095 085 A15 A | EURO | 12 | 95 | 850 | 0 | 1 | B13 | 353 | 175 | 190 | 190 | 25,5 |
| | QE 095 085 B15 A | EURO | 12 | 95 | 850 | 1 | 1 | B13 | 353 | 175 | 190 | 190 | 25,5 |
| | QE 100 093 A15 A | EURO | 12 | 100 | 930 | 0 | 1 | B13 | 353 | 175 | 190 | 190 | 25,5 |
| | QE 100 093 B15 A | EURO | 12 | 100 | 930 | 1 | 1 | B13 | 353 | 175 | 190 | 190 | 25,5 |

| Type case | Code | Standard case | Voltage, V | Capacity (Ah) | CCA (EN), A | Layout | Terminal | Hold Down | Length (mm) | Width (mm) | Height (mm) | Total Height (mm) | Weight, kg |
|-----------|------------------|---------------|------------|---------------|-------------|--------|----------|-----------|-------------|------------|-------------|-------------------|------------|
| L6 | QE 105 090 A16 A | EURO | 12 | 105 | 900 | 0 | 1 | B13 | 394 | 175 | 190 | 190 | 28,1 |
| | QE 105 090 B16 A | EURO | 12 | 105 | 900 | 1 | 1 | B13 | 394 | 175 | 190 | 190 | 28,1 |
| | QE 110 095 A16 A | EURO | 12 | 110 | 950 | 0 | 1 | B13 | 394 | 175 | 190 | 190 | 28,5 |
| | QE 110 095 B16 A | EURO | 12 | 110 | 950 | 1 | 1 | B13 | 394 | 175 | 190 | 190 | 28,5 |
| LB3 | QE 065 065 A83 A | EURO | 12 | 65 | 650 | 0 | 1 | B13 | 278 | 175 | 175 | 175 | 20,0 |
| | QE 065 065 B83 A | EURO | 12 | 65 | 650 | 1 | 1 | B13 | 278 | 175 | 175 | 175 | 20,0 |
| LB4 | QE 075 073 A84 A | EURO | 12 | 75 | 730 | 0 | 1 | B13 | 315 | 175 | 175 | 175 | 21,4 |
| | QE 075 073 B84 A | EURO | 12 | 75 | 730 | 1 | 1 | B13 | 315 | 175 | 175 | 175 | 21,4 |
| B24 | QE 040 037 A24 B | ASIA | 12 | 40 | 370 | 0 | 1 | B01 | 237 | 128 | 200 | 222 | 13,6 |
| | QE 040 037 B24 B | ASIA | 12 | 40 | 370 | 1 | 1 | B01 | 237 | 128 | 200 | 222 | 13,6 |
| D23 | QE 060 060 A23 B | ASIA | 12 | 60 | 600 | 0 | 1 | B01 | 229 | 175 | 201 | 222 | 17,9 |
| | QE 060 060 B23 B | ASIA | 12 | 60 | 600 | 1 | 1 | B01 | 229 | 175 | 201 | 222 | 17,9 |
| | QE 064 062 A23 B | ASIA | 12 | 64 | 620 | 0 | 1 | B01 | 229 | 175 | 201 | 222 | 18,0 |
| | QE 064 062 B23 B | ASIA | 12 | 64 | 620 | 1 | 1 | B01 | 229 | 175 | 201 | 222 | 18,0 |
| | QE 065 065 A23 B | ASIA | 12 | 65 | 650 | 0 | 1 | B01 | 229 | 175 | 201 | 222 | 18,1 |
| | QE 065 065 B23 B | ASIA | 12 | 65 | 650 | 1 | 1 | B01 | 229 | 175 | 201 | 222 | 18,1 |
| D26 | QE 070 065 A26 B | ASIA | 12 | 70 | 650 | 0 | 1 | B01 | 260 | 172 | 200 | 221 | 20,0 |
| | QE 070 065 B26 B | ASIA | 12 | 70 | 650 | 1 | 1 | B01 | 260 | 172 | 200 | 221 | 20,0 |
| | QE 072 068 A26 B | ASIA | 12 | 72 | 680 | 0 | 1 | B01 | 260 | 172 | 200 | 221 | 20,5 |
| | QE 072 068 B26 B | ASIA | 12 | 72 | 680 | 1 | 1 | B01 | 260 | 172 | 200 | 221 | 20,5 |
| | QE 075 075 A26 B | ASIA | 12 | 75 | 750 | 0 | 1 | B01 | 260 | 172 | 200 | 221 | 20,8 |
| | QE 075 075 B26 B | ASIA | 12 | 75 | 750 | 1 | 1 | B01 | 260 | 172 | 200 | 221 | 20,8 |
| D31 | QE 075 070 A31 B | ASIA | 12 | 75 | 700 | 0 | 1 | B01 | 305 | 171 | 200 | 221 | 21,0 |
| | QE 075 070 B31 B | ASIA | 12 | 75 | 700 | 1 | 1 | B01 | 305 | 171 | 200 | 221 | 21,0 |
| | QE 085 075 A31 B | ASIA | 12 | 85 | 750 | 0 | 1 | B01 | 305 | 171 | 200 | 221 | 22,0 |
| | QE 085 075 B31 B | ASIA | 12 | 85 | 750 | 1 | 1 | B01 | 305 | 171 | 200 | 221 | 22,0 |
| | QE 086 072 A31 B | ASIA | 12 | 86 | 720 | 0 | 1 | B01 | 305 | 171 | 200 | 221 | 22,1 |
| | QE 086 072 B31 B | ASIA | 12 | 86 | 720 | 1 | 1 | B01 | 305 | 171 | 200 | 221 | 22,1 |
| | QE 095 080 A31 B | ASIA | 12 | 95 | 800 | 0 | 1 | B01 | 305 | 171 | 200 | 221 | 22,5 |
| | QE 095 080 B31 B | ASIA | 12 | 95 | 800 | 1 | 1 | B01 | 305 | 171 | 200 | 221 | 22,5 |

| Type case | Code | Standard case | Voltage, V | Capacity (Ah) | CCA (EN), A | Layout | Terminal | Hold Down | Length (mm) | Width (mm) | Height (mm) | Total Height (mm) | Weight, kg |
|-----------|------------------|---------------|------------|---------------|-------------|--------|----------|-----------|-------------|------------|-------------|-------------------|------------|
| | QE 105 090 A31 B | ASIA | 12 | 105 | 900 | 0 | 1 | B01 | 305 | 171 | 200 | 221 | 23,0 |
| | QE 105 090 B31 B | ASIA | 12 | 105 | 900 | 1 | 1 | B01 | 305 | 171 | 200 | 221 | 23,0 |

POWER EFB HD

| | | | | | | | | | | | | | |
|----|------------------|------|----|-----|-------|---|---|-----|-----|-----|-----|-----|------|
| D5 | QE 190 105 A05 C | EURO | 12 | 190 | 1 050 | 3 | 1 | B00 | 510 | 222 | 197 | 220 | 43,5 |
| | QE 190 105 B05 C | EURO | 12 | 190 | 1 050 | 4 | 1 | B00 | 510 | 222 | 197 | 220 | 43,5 |
| D6 | QE 225 120 A06 C | EURO | 12 | 225 | 1 200 | 3 | 1 | B00 | 516 | 275 | 217 | 241 | 58,5 |
| | QE 225 120 B06 C | EURO | 12 | 225 | 1 200 | 4 | 1 | B00 | 516 | 275 | 217 | 241 | 58,5 |
| | QE 240 125 A06 C | EURO | 12 | 240 | 1 250 | 3 | 1 | B00 | 516 | 275 | 217 | 241 | 59,5 |
| | QE 240 125 B06 C | EURO | 12 | 240 | 1 250 | 4 | 1 | B00 | 516 | 275 | 217 | 241 | 59,5 |

SELECTION

| | | | | | | | | | | | | | |
|-----|------------------|------|----|-----|-----|---|---|-----|-----|-----|-----|-----|------|
| L1 | QX 044 036 A11 A | EURO | 12 | 44 | 360 | 0 | 1 | B13 | 207 | 175 | 190 | 190 | 11,9 |
| | QX 044 036 B11 A | EURO | 12 | 44 | 360 | 1 | 1 | B13 | 207 | 175 | 190 | 190 | 11,9 |
| | QX 050 042 A11 A | EURO | 12 | 50 | 420 | 0 | 1 | B13 | 207 | 175 | 190 | 190 | 12,2 |
| | QX 050 042 B11 A | EURO | 12 | 50 | 420 | 1 | 1 | B13 | 207 | 175 | 190 | 190 | 12,2 |
| L2 | QX 055 046 A12 A | EURO | 12 | 55 | 460 | 0 | 1 | B13 | 242 | 175 | 190 | 190 | 13,8 |
| | QX 055 046 B12 A | EURO | 12 | 55 | 460 | 1 | 1 | B13 | 242 | 175 | 190 | 190 | 13,8 |
| | QX 060 051 A12 A | EURO | 12 | 60 | 510 | 0 | 1 | B13 | 242 | 175 | 190 | 190 | 14,1 |
| | QX 060 051 B12 A | EURO | 12 | 60 | 510 | 1 | 1 | B13 | 242 | 175 | 190 | 190 | 14,1 |
| L5 | QX 090 072 A15 A | EURO | 12 | 90 | 720 | 0 | 1 | B09 | 353 | 175 | 190 | 190 | 20,7 |
| | QX 090 072 B15 A | EURO | 12 | 90 | 720 | 1 | 1 | B09 | 353 | 175 | 190 | 190 | 20,7 |
| L6 | QX 105 085 A16 A | EURO | 12 | 105 | 850 | 0 | 1 | B09 | 394 | 175 | 190 | 190 | 24,5 |
| | QX 105 085 B16 A | EURO | 12 | 105 | 850 | 1 | 1 | B09 | 394 | 175 | 190 | 190 | 24,5 |
| LB2 | QX 060 051 A82 A | EURO | 12 | 60 | 510 | 0 | 1 | B13 | 242 | 175 | 175 | 175 | 14,0 |
| | QX 060 051 B82 A | EURO | 12 | 60 | 510 | 1 | 1 | B13 | 242 | 175 | 175 | 175 | 14,0 |
| B20 | QX 042 035 C20 B | ASIA | 12 | 42 | 350 | 0 | 3 | B01 | 196 | 128 | 202 | 223 | 10,0 |
| | QX 042 035 D20 B | ASIA | 12 | 42 | 350 | 1 | 3 | B01 | 196 | 128 | 202 | 223 | 10,0 |
| D26 | QX 068 058 A26 B | ASIA | 12 | 68 | 580 | 0 | 1 | B15 | 260 | 172 | 200 | 221 | 17,0 |

| Type case | Code | Standard case | Voltage, V | Capacity (Ah) | CCA (EN), A | Layout | Terminal | Hold Down | Length (mm) | Width (mm) | Height (mm) | Total Height (mm) | Weight, kg |
|-----------|------------------|---------------|------------|---------------|-------------|--------|----------|-----------|-------------|------------|-------------|-------------------|------------|
| D31 | QX 068 058 B26 B | ASIA | 12 | 68 | 580 | 1 | 1 | B15 | 260 | 172 | 200 | 221 | 17,0 |
| | QX 085 069 A31 B | ASIA | 12 | 85 | 690 | 0 | 1 | B01 | 305 | 171 | 205 | 226 | 19,8 |
| | QX 085 069 B31 B | ASIA | 12 | 85 | 690 | 1 | 1 | B01 | 305 | 171 | 205 | 226 | 19,8 |

SELECTION EVO

| | | | | | | | | | | | | | |
|----|------------------|------|----|----|-----|---|---|-----|-----|-----|-----|-----|------|
| L0 | QV 044 040 A10 A | EURO | 12 | 44 | 400 | 0 | 1 | B13 | 175 | 175 | 190 | 190 | 10,0 |
| | QV 044 040 B10 A | EURO | 12 | 44 | 400 | 1 | 1 | B13 | 175 | 175 | 190 | 190 | 10,0 |
| L1 | QV 045 040 A11 A | EURO | 12 | 45 | 400 | 0 | 1 | B13 | 207 | 175 | 190 | 190 | 12,6 |
| | QV 045 040 B11 A | EURO | 12 | 45 | 400 | 1 | 1 | B13 | 207 | 175 | 190 | 190 | 12,6 |
| | QV 050 046 A11 A | EURO | 12 | 50 | 460 | 0 | 1 | B13 | 207 | 175 | 190 | 190 | 12,3 |
| L2 | QV 050 046 B11 A | EURO | 12 | 50 | 460 | 1 | 1 | B13 | 207 | 175 | 190 | 190 | 12,3 |
| | QV 055 054 A11 A | EURO | 12 | 55 | 540 | 0 | 1 | B13 | 207 | 175 | 190 | 190 | 13,1 |
| | QV 055 054 B11 A | EURO | 12 | 55 | 540 | 1 | 1 | B13 | 207 | 175 | 190 | 190 | 13,1 |
| | QV 055 050 A12 A | EURO | 12 | 55 | 500 | 0 | 1 | B13 | 242 | 175 | 190 | 190 | 14,0 |
| | QV 055 050 B12 A | EURO | 12 | 55 | 500 | 1 | 1 | B13 | 242 | 175 | 190 | 190 | 14,0 |
| | QV 060 054 A12 A | EURO | 12 | 60 | 540 | 0 | 1 | B13 | 242 | 175 | 190 | 190 | 14,3 |
| | QV 060 054 B12 A | EURO | 12 | 60 | 540 | 1 | 1 | B13 | 242 | 175 | 190 | 190 | 14,3 |
| | QV 060 061 A12 A | EURO | 12 | 60 | 610 | 0 | 1 | B13 | 242 | 175 | 190 | 190 | 14,9 |
| | QV 060 061 B12 A | EURO | 12 | 60 | 610 | 1 | 1 | B13 | 242 | 175 | 190 | 190 | 14,9 |
| | QV 062 055 A12 A | EURO | 12 | 62 | 550 | 0 | 1 | B13 | 242 | 175 | 190 | 190 | 14,8 |
| | QV 062 055 B12 A | EURO | 12 | 62 | 550 | 1 | 1 | B13 | 242 | 175 | 190 | 190 | 14,8 |
| | QV 063 061 A12 A | EURO | 12 | 63 | 610 | 0 | 1 | B13 | 242 | 175 | 190 | 190 | 14,9 |
| | QV 063 061 B12 A | EURO | 12 | 63 | 610 | 1 | 1 | B13 | 242 | 175 | 190 | 190 | 14,9 |
| | QV 063 064 A12 A | EURO | 12 | 63 | 640 | 0 | 1 | B13 | 242 | 175 | 190 | 190 | 15,0 |
| | QV 063 064 B12 A | EURO | 12 | 63 | 640 | 1 | 1 | B13 | 242 | 175 | 190 | 190 | 15,0 |
| | QV 065 059 A12 A | EURO | 12 | 65 | 590 | 0 | 1 | B13 | 242 | 175 | 190 | 190 | 15,1 |
| | QV 065 059 B12 A | EURO | 12 | 65 | 590 | 1 | 1 | B13 | 242 | 175 | 190 | 190 | 15,1 |
| | QV 066 064 A12 A | EURO | 12 | 66 | 640 | 0 | 1 | B13 | 242 | 175 | 190 | 190 | 15,2 |
| | QV 066 064 B12 A | EURO | 12 | 66 | 640 | 1 | 1 | B13 | 242 | 175 | 190 | 190 | 15,2 |

| Type case | Code | Standard case | Voltage, V | Capacity (Ah) | CCA (EN), A | Layout | Terminal | Hold Down | Length (mm) | Width (mm) | Height (mm) | Total Height (mm) | Weight, kg |
|------------------|------------------|---------------|------------|---------------|-------------|--------|----------|-----------|-------------|------------|-------------|-------------------|------------|
| L3 | QV 066 059 A13 A | EURO | 12 | 66 | 590 | 0 | 1 | B13 | 278 | 175 | 190 | 190 | 16,2 |
| | QV 066 059 B13 A | EURO | 12 | 66 | 590 | 1 | 1 | B13 | 278 | 175 | 190 | 190 | 16,2 |
| | QV 068 062 A13 A | EURO | 12 | 68 | 620 | 0 | 1 | B13 | 278 | 175 | 190 | 190 | 16,4 |
| | QV 068 062 B13 A | EURO | 12 | 68 | 620 | 1 | 1 | B13 | 278 | 175 | 190 | 190 | 16,4 |
| | QV 070 064 A13 A | EURO | 12 | 70 | 640 | 0 | 1 | B13 | 278 | 175 | 190 | 190 | 16,5 |
| | QV 070 064 B13 A | EURO | 12 | 70 | 640 | 1 | 1 | B13 | 278 | 175 | 190 | 190 | 16,5 |
| | QV 072 064 A13 A | EURO | 12 | 72 | 640 | 0 | 1 | B13 | 278 | 175 | 190 | 190 | 16,9 |
| | QV 072 064 B13 A | EURO | 12 | 72 | 640 | 1 | 1 | B13 | 278 | 175 | 190 | 190 | 16,9 |
| | QV 074 068 A13 A | EURO | 12 | 74 | 680 | 0 | 1 | B13 | 278 | 175 | 190 | 190 | 17,2 |
| | QV 074 068 B13 A | EURO | 12 | 74 | 680 | 1 | 1 | B13 | 278 | 175 | 190 | 190 | 17,2 |
| | QV 075 072 A13 A | EURO | 12 | 75 | 720 | 0 | 1 | B13 | 278 | 175 | 190 | 190 | 17,5 |
| | QV 075 072 B13 A | EURO | 12 | 75 | 720 | 1 | 1 | B13 | 278 | 175 | 190 | 190 | 17,5 |
| | QV 078 078 A13 A | EURO | 12 | 78 | 780 | 0 | 1 | B13 | 278 | 175 | 190 | 190 | 18,1 |
| | QV 078 078 B13 A | EURO | 12 | 78 | 780 | 1 | 1 | B13 | 278 | 175 | 190 | 190 | 18,1 |
| | QV 080 076 A13 A | EURO | 12 | 80 | 760 | 0 | 1 | B13 | 278 | 175 | 190 | 190 | 18,6 |
| QV 080 076 B13 A | EURO | 12 | 80 | 760 | 1 | 1 | B13 | 278 | 175 | 190 | 190 | 18,6 | |
| L4 | QV 080 074 A14 A | EURO | 12 | 80 | 740 | 0 | 1 | B13 | 315 | 175 | 190 | 190 | 19,5 |
| | QV 080 074 B14 A | EURO | 12 | 80 | 740 | 1 | 1 | B13 | 315 | 175 | 190 | 190 | 19,5 |
| | QV 085 080 A14 A | EURO | 12 | 85 | 800 | 0 | 1 | B13 | 315 | 175 | 190 | 190 | 20,1 |
| | QV 085 080 B14 A | EURO | 12 | 85 | 800 | 1 | 1 | B13 | 315 | 175 | 190 | 190 | 20,1 |
| | QV 090 085 A14 A | EURO | 12 | 90 | 850 | 0 | 1 | B13 | 315 | 175 | 190 | 190 | 20,5 |
| | QV 090 085 B14 A | EURO | 12 | 90 | 850 | 1 | 1 | B13 | 315 | 175 | 190 | 190 | 20,5 |
| L5 | QV 095 080 A15 A | EURO | 12 | 95 | 800 | 0 | 1 | B09 | 353 | 175 | 190 | 190 | 21,9 |
| | QV 095 080 B15 A | EURO | 12 | 95 | 800 | 1 | 1 | B09 | 353 | 175 | 190 | 190 | 21,9 |
| | QV 095 085 A15 A | EURO | 12 | 95 | 850 | 0 | 1 | B09 | 353 | 175 | 190 | 190 | 22,2 |
| | QV 095 085 B15 A | EURO | 12 | 95 | 850 | 1 | 1 | B09 | 353 | 175 | 190 | 190 | 22,2 |
| | QV 100 083 A15 A | EURO | 12 | 100 | 830 | 0 | 1 | B09 | 353 | 175 | 190 | 190 | 22,2 |
| | QV 100 083 B15 A | EURO | 12 | 100 | 830 | 1 | 1 | B09 | 353 | 175 | 190 | 190 | 22,2 |
| | QV 100 090 A15 A | EURO | 12 | 100 | 900 | 0 | 1 | B09 | 353 | 175 | 190 | 190 | 24,6 |
| | QV 100 090 B15 A | EURO | 12 | 100 | 900 | 1 | 1 | B09 | 353 | 175 | 190 | 190 | 24,6 |

| Type case | Code | Standard case | Voltage, V | Capacity (Ah) | CCA (EN), A | Layout | Terminal | Hold Down | Length (mm) | Width (mm) | Height (mm) | Total Height (mm) | Weight, kg |
|-----------|------------------|---------------|------------|---------------|-------------|--------|----------|-----------|-------------|------------|-------------|-------------------|------------|
| L6 | QV 110 092 A16 A | EURO | 12 | 110 | 920 | 0 | 1 | B09 | 394 | 175 | 190 | 190 | 25,0 |
| | QV 110 092 B16 A | EURO | 12 | 110 | 920 | 1 | 1 | B09 | 394 | 175 | 190 | 190 | 25,0 |
| LB1 | QV 041 036 A81 A | EURO | 12 | 41 | 360 | 0 | 1 | B13 | 207 | 175 | 175 | 175 | 10,3 |
| | QV 041 036 B81 A | EURO | 12 | 41 | 360 | 1 | 1 | B13 | 207 | 175 | 175 | 175 | 10,3 |
| | QV 044 044 A81 A | EURO | 12 | 44 | 440 | 0 | 1 | B13 | 207 | 175 | 175 | 175 | 11,8 |
| | QV 044 044 B81 A | EURO | 12 | 44 | 440 | 1 | 1 | B13 | 207 | 175 | 175 | 175 | 11,8 |
| | QV 050 046 A81 A | EURO | 12 | 50 | 460 | 0 | 1 | B13 | 207 | 175 | 175 | 175 | 12,1 |
| | QV 050 046 B81 A | EURO | 12 | 50 | 460 | 1 | 1 | B13 | 207 | 175 | 175 | 175 | 12,1 |
| | QV 052 052 A81 A | EURO | 12 | 52 | 520 | 0 | 1 | B13 | 207 | 175 | 175 | 175 | 12,9 |
| | QV 052 052 B81 A | EURO | 12 | 52 | 520 | 1 | 1 | B13 | 207 | 175 | 175 | 175 | 12,9 |
| LB2 | QV 055 050 A82 A | EURO | 12 | 55 | 500 | 0 | 1 | B13 | 242 | 175 | 175 | 175 | 13,8 |
| | QV 055 050 B82 A | EURO | 12 | 55 | 500 | 1 | 1 | B13 | 242 | 175 | 175 | 175 | 13,8 |
| | QV 060 054 A82 A | EURO | 12 | 60 | 540 | 0 | 1 | B13 | 242 | 175 | 175 | 175 | 14,2 |
| | QV 060 054 B82 A | EURO | 12 | 60 | 540 | 1 | 1 | B13 | 242 | 175 | 175 | 175 | 14,2 |
| | QV 061 060 A82 A | EURO | 12 | 61 | 600 | 0 | 1 | B13 | 242 | 175 | 175 | 175 | 14,4 |
| | QV 061 060 B82 A | EURO | 12 | 61 | 600 | 1 | 1 | B13 | 242 | 175 | 175 | 175 | 14,4 |
| | QV 063 064 A82 A | EURO | 12 | 63 | 640 | 0 | 1 | B13 | 242 | 175 | 175 | 175 | 14,9 |
| | QV 063 064 B82 A | EURO | 12 | 63 | 640 | 1 | 1 | B13 | 242 | 175 | 175 | 175 | 14,9 |
| LB3 | QV 068 063 A83 A | EURO | 12 | 68 | 630 | 0 | 1 | B13 | 278 | 175 | 175 | 175 | 16,1 |
| | QV 068 063 B83 A | EURO | 12 | 68 | 630 | 1 | 1 | B13 | 278 | 175 | 175 | 175 | 16,1 |
| | QV 074 070 A83 A | EURO | 12 | 74 | 700 | 0 | 1 | B13 | 278 | 175 | 175 | 175 | 16,4 |
| | QV 074 070 B83 A | EURO | 12 | 74 | 700 | 1 | 1 | B13 | 278 | 175 | 175 | 175 | 16,4 |
| LB4 | QV 080 074 A84 A | EURO | 12 | 80 | 740 | 0 | 1 | B13 | 313 | 175 | 175 | 175 | 18,3 |
| | QV 080 074 B84 A | EURO | 12 | 80 | 740 | 1 | 1 | B13 | 313 | 175 | 175 | 175 | 18,3 |
| | QV 085 080 A84 A | EURO | 12 | 85 | 800 | 0 | 1 | B13 | 313 | 175 | 175 | 175 | 19,1 |
| | QV 085 080 B84 A | EURO | 12 | 85 | 800 | 1 | 1 | B13 | 313 | 175 | 175 | 175 | 19,1 |
| LB5 | QV 080 070 A85 A | EURO | 12 | 80 | 700 | 0 | 1 | B09 | 353 | 175 | 175 | 175 | 19,7 |
| | QV 080 070 B85 A | EURO | 12 | 80 | 700 | 1 | 1 | B09 | 353 | 175 | 175 | 175 | 19,7 |
| | QV 085 075 A85 A | EURO | 12 | 85 | 750 | 0 | 1 | B09 | 353 | 175 | 175 | 175 | 19,7 |
| | QV 085 075 B85 A | EURO | 12 | 85 | 750 | 1 | 1 | B09 | 353 | 175 | 175 | 175 | 19,7 |

| Type case | Code | Standard case | Voltage, V | Capacity (Ah) | CCA (EN), A | Layout | Terminal | Hold Down | Length (mm) | Width (mm) | Height (mm) | Total Height (mm) | Weight, kg |
|------------------|------------------|---------------|------------|---------------|-------------|--------|----------|-----------|-------------|------------|-------------|-------------------|------------|
| B19 | QV 088 074 A85 A | EURO | 12 | 88 | 740 | 0 | 1 | B09 | 353 | 175 | 175 | 175 | 19,8 |
| | QV 088 074 B85 A | EURO | 12 | 88 | 740 | 1 | 1 | B09 | 353 | 175 | 175 | 175 | 19,8 |
| | QV 095 085 A85 A | EURO | 12 | 95 | 850 | 0 | 1 | B09 | 353 | 175 | 175 | 175 | 19,8 |
| | QV 095 085 B85 A | EURO | 12 | 95 | 850 | 1 | 1 | B09 | 353 | 175 | 175 | 175 | 19,8 |
| | QV 035 033 C19 B | ASIA | 12 | 35 | 330 | 0 | 3 | B01 | 187 | 127 | 202 | 225 | 9,6 |
| | QV 035 033 D19 B | ASIA | 12 | 35 | 330 | 1 | 3 | B01 | 187 | 127 | 202 | 225 | 9,6 |
| | QV 038 036 C19 B | ASIA | 12 | 38 | 360 | 0 | 3 | B01 | 187 | 127 | 202 | 225 | 9,9 |
| | QV 038 036 D19 B | ASIA | 12 | 38 | 360 | 1 | 3 | B01 | 187 | 127 | 202 | 225 | 9,9 |
| | QV 040 035 C19 B | ASIA | 12 | 40 | 350 | 0 | 3 | B01 | 187 | 127 | 202 | 225 | 9,9 |
| QV 040 035 D19 B | ASIA | 12 | 40 | 350 | 1 | 3 | B01 | 187 | 127 | 202 | 225 | 9,9 | |
| B20 | QV 036 032 C20 B | ASIA | 12 | 36 | 320 | 0 | 3 | B01 | 196 | 128 | 202 | 223 | 9,5 |
| | QV 036 032 D20 B | ASIA | 12 | 36 | 320 | 1 | 3 | B01 | 196 | 128 | 202 | 223 | 9,5 |
| B24 | QV 045 039 C24 B | ASIA | 12 | 45 | 390 | 0 | 3 | B01 | 237 | 128 | 200 | 222 | 11,8 |
| | QV 045 039 D24 B | ASIA | 12 | 45 | 390 | 1 | 3 | B01 | 237 | 128 | 200 | 222 | 11,8 |
| D23 | QV 050 045 C24 B | ASIA | 12 | 50 | 450 | 0 | 3 | B01 | 237 | 128 | 200 | 222 | 12,5 |
| | QV 050 045 D24 B | ASIA | 12 | 50 | 450 | 1 | 3 | B01 | 237 | 128 | 200 | 222 | 12,5 |
| | QV 060 052 A23 B | ASIA | 12 | 60 | 520 | 0 | 1 | B01 | 229 | 175 | 202 | 223 | 14,6 |
| | QV 060 052 B23 B | ASIA | 12 | 60 | 520 | 1 | 1 | B01 | 229 | 175 | 202 | 223 | 14,6 |
| | QV 060 054 A23 B | ASIA | 12 | 60 | 540 | 0 | 1 | B01 | 229 | 175 | 202 | 223 | 14,9 |
| | QV 060 054 B23 B | ASIA | 12 | 60 | 540 | 1 | 1 | B01 | 229 | 175 | 202 | 223 | 14,9 |
| | QV 065 059 A23 B | ASIA | 12 | 65 | 590 | 0 | 1 | B01 | 229 | 175 | 202 | 223 | 15,3 |
| | QV 065 059 B23 B | ASIA | 12 | 65 | 590 | 1 | 1 | B01 | 229 | 175 | 202 | 223 | 15,3 |
| | QV 068 064 A23 B | ASIA | 12 | 68 | 640 | 0 | 1 | B01 | 229 | 175 | 202 | 223 | 16,0 |
| QV 068 064 B23 B | ASIA | 12 | 68 | 640 | 1 | 1 | B01 | 229 | 175 | 202 | 223 | 16,0 | |
| D26 | QV 070 063 A26 B | ASIA | 12 | 70 | 630 | 0 | 1 | B15 | 260 | 172 | 200 | 221 | 17,4 |
| | QV 070 063 B26 B | ASIA | 12 | 70 | 630 | 1 | 1 | B15 | 260 | 172 | 200 | 221 | 17,4 |
| | QV 075 068 A26 B | ASIA | 12 | 75 | 680 | 0 | 1 | B15 | 260 | 172 | 200 | 221 | 17,7 |
| | QV 075 068 B26 B | ASIA | 12 | 75 | 680 | 1 | 1 | B15 | 260 | 172 | 200 | 221 | 17,7 |
| | QV 080 073 A26 B | ASIA | 12 | 80 | 730 | 0 | 1 | B15 | 260 | 172 | 200 | 221 | 18,0 |
| | QV 080 073 B26 B | ASIA | 12 | 80 | 730 | 1 | 1 | B15 | 260 | 172 | 200 | 221 | 18,0 |

| Type case | Code | Standard case | Voltage, V | Capacity (Ah) | CCA (EN), A | Layout | Terminal | Hold Down | Length (mm) | Width (mm) | Height (mm) | Total Height (mm) | Weight, kg |
|-----------|------------------|---------------|------------|---------------|-------------|--------|----------|-----------|-------------|------------|-------------|-------------------|------------|
| D31 | QV 090 075 A31 B | ASIA | 12 | 90 | 750 | 0 | 1 | B01 | 305 | 171 | 205 | 226 | 20,6 |
| | QV 090 075 B31 B | ASIA | 12 | 90 | 750 | 1 | 1 | B01 | 305 | 171 | 205 | 226 | 20,6 |
| | QV 090 082 A31 B | ASIA | 12 | 90 | 820 | 0 | 1 | B01 | 305 | 171 | 205 | 226 | 20,7 |
| | QV 090 082 B31 B | ASIA | 12 | 90 | 820 | 1 | 1 | B01 | 305 | 171 | 205 | 226 | 20,7 |
| | QV 095 083 A31 B | ASIA | 12 | 95 | 830 | 0 | 1 | B01 | 305 | 171 | 205 | 226 | 20,8 |
| | QV 095 083 B31 B | ASIA | 12 | 95 | 830 | 1 | 1 | B01 | 305 | 171 | 205 | 226 | 20,8 |
| | QV 100 085 A31 B | ASIA | 12 | 100 | 850 | 0 | 1 | B01 | 305 | 171 | 205 | 226 | 21,2 |
| | QV 100 085 B31 B | ASIA | 12 | 100 | 850 | 1 | 1 | B01 | 305 | 171 | 205 | 226 | 21,2 |
| G31 | QV 100 085 I93 B | ASIA | 12 | 100 | 850 | 7 | 1 | B01 | 330 | 175 | 219 | 242 | 23,7 |
| | QV 100 085 J93 B | ASIA | 12 | 100 | 850 | 7 | 11 | B01 | 330 | 175 | 219 | 242 | 23,7 |
| | QV 105 090 I93 B | ASIA | 12 | 105 | 900 | 7 | 1 | B01 | 330 | 175 | 219 | 242 | 24,4 |
| | QV 105 090 J93 B | ASIA | 12 | 105 | 900 | 7 | 11 | B01 | 330 | 175 | 219 | 242 | 24,4 |
| | QV 110 095 I93 B | ASIA | 12 | 110 | 950 | 7 | 1 | B01 | 330 | 175 | 219 | 242 | 25,1 |
| | QV 110 095 J93 B | ASIA | 12 | 110 | 950 | 7 | 11 | B01 | 330 | 175 | 219 | 242 | 25,1 |
| | QV 115 100 I93 B | ASIA | 12 | 115 | 1 000 | 7 | 1 | B01 | 330 | 175 | 219 | 242 | 27,1 |
| | QV 115 100 J93 B | ASIA | 12 | 115 | 1 000 | 7 | 11 | B01 | 330 | 175 | 219 | 242 | 27,1 |


SELECTION EVO HD

| | | | | | | | | | | | | | |
|----|------------------|------|----|-----|-----|---|---|-----|-----|-----|-----|-----|------|
| D4 | QV 120 080 A04 C | EURO | 12 | 120 | 800 | 3 | 1 | B00 | 505 | 183 | 199 | 224 | 30,8 |
| | QV 120 080 B04 C | EURO | 12 | 120 | 800 | 4 | 1 | B00 | 505 | 183 | 199 | 224 | 30,8 |
| | QV 130 080 A04 C | EURO | 12 | 130 | 800 | 3 | 1 | B00 | 505 | 183 | 199 | 224 | 31,6 |
| | QV 130 080 B04 C | EURO | 12 | 130 | 800 | 4 | 1 | B00 | 505 | 183 | 199 | 224 | 31,6 |
| | QV 135 080 A04 C | EURO | 12 | 135 | 800 | 3 | 1 | B00 | 505 | 183 | 199 | 224 | 32,1 |
| | QV 135 080 B04 C | EURO | 12 | 135 | 800 | 4 | 1 | B00 | 505 | 183 | 199 | 224 | 32,1 |
| | QV 135 095 A04 C | EURO | 12 | 135 | 950 | 3 | 1 | B00 | 505 | 183 | 199 | 224 | 33,4 |
| | QV 135 095 B04 C | EURO | 12 | 135 | 950 | 4 | 1 | B00 | 505 | 183 | 199 | 224 | 33,4 |
| | QV 140 080 A04 C | EURO | 12 | 140 | 800 | 3 | 1 | B00 | 505 | 183 | 199 | 224 | 32,6 |
| | QV 140 080 B04 C | EURO | 12 | 140 | 800 | 4 | 1 | B00 | 505 | 183 | 199 | 224 | 32,6 |
| | QV 145 080 A04 C | EURO | 12 | 145 | 800 | 3 | 1 | B00 | 505 | 183 | 199 | 224 | 32,7 |


| Type case | Code | Standard case | Voltage, V | Capacity (Ah) | CCA (EN), A | Layout | Terminal | Hold Down | Length (mm) | Width (mm) | Height (mm) | Total Height (mm) | Weight, kg |
|------------------|------------------|---------------|------------|---------------|-------------|--------|----------|-----------|-------------|------------|-------------|-------------------|------------|
| D5 | QV 145 080 B04 C | EURO | 12 | 145 | 800 | 4 | 1 | B00 | 505 | 183 | 199 | 224 | 32,7 |
| | QV 145 095 A04 C | EURO | 12 | 145 | 950 | 3 | 1 | B00 | 505 | 183 | 199 | 224 | 35,5 |
| | QV 145 095 B04 C | EURO | 12 | 145 | 950 | 4 | 1 | B00 | 505 | 183 | 199 | 224 | 35,5 |
| | QV 150 100 A04 C | EURO | 12 | 150 | 1 000 | 3 | 1 | B00 | 505 | 183 | 199 | 224 | 34,7 |
| | QV 150 100 B04 C | EURO | 12 | 150 | 1 000 | 4 | 1 | B00 | 505 | 183 | 199 | 224 | 34,7 |
| | QV 170 100 A05 C | EURO | 12 | 170 | 1 000 | 3 | 1 | B00 | 510 | 222 | 197 | 220 | 40,5 |
| | QV 170 100 B05 C | EURO | 12 | 170 | 1 000 | 4 | 1 | B00 | 510 | 222 | 197 | 220 | 40,5 |
| | QV 180 110 A05 C | EURO | 12 | 180 | 1 100 | 3 | 1 | B00 | 510 | 222 | 197 | 220 | 40,8 |
| | QV 180 110 B05 C | EURO | 12 | 180 | 1 100 | 4 | 1 | B00 | 510 | 222 | 197 | 220 | 40,8 |
| | QV 190 125 A05 C | EURO | 12 | 190 | 1 250 | 3 | 1 | B00 | 510 | 222 | 197 | 220 | 42,0 |
| QV 190 125 B05 C | EURO | 12 | 190 | 1 250 | 4 | 1 | B00 | 510 | 222 | 197 | 220 | 42,0 | |
| D6 | QV 200 125 A05 C | EURO | 12 | 200 | 1 250 | 3 | 1 | B00 | 510 | 222 | 197 | 220 | 43,8 |
| | QV 200 125 B05 C | EURO | 12 | 200 | 1 250 | 4 | 1 | B00 | 510 | 222 | 197 | 220 | 43,8 |
| | QV 210 120 A06 C | EURO | 12 | 210 | 1 200 | 3 | 1 | B00 | 516 | 275 | 217 | 241 | 52,7 |
| | QV 210 120 B06 C | EURO | 12 | 210 | 1 200 | 4 | 1 | B00 | 516 | 275 | 217 | 241 | 52,7 |
| | QV 220 120 A06 C | EURO | 12 | 220 | 1 200 | 3 | 1 | B00 | 516 | 275 | 217 | 241 | 53,5 |
| | QV 220 120 B06 C | EURO | 12 | 220 | 1 200 | 4 | 1 | B00 | 516 | 275 | 217 | 241 | 53,5 |
| | QV 225 125 A06 C | EURO | 12 | 225 | 1 250 | 3 | 1 | B00 | 516 | 275 | 217 | 241 | 55,1 |
| | QV 225 125 B06 C | EURO | 12 | 225 | 1 250 | 4 | 1 | B00 | 516 | 275 | 217 | 241 | 55,1 |
| | QV 225 140 A06 C | EURO | 12 | 225 | 1 400 | 3 | 1 | B00 | 516 | 275 | 217 | 241 | 57,9 |
| | QV 225 140 B06 C | EURO | 12 | 225 | 1 400 | 4 | 1 | B00 | 516 | 275 | 217 | 241 | 57,9 |
| E41 | QV 235 135 A06 C | EURO | 12 | 235 | 1 350 | 3 | 1 | B00 | 516 | 275 | 217 | 241 | 58,6 |
| | QV 235 135 B06 C | EURO | 12 | 235 | 1 350 | 4 | 1 | B00 | 516 | 275 | 217 | 241 | 58,6 |
| | QV 240 140 A06 C | EURO | 12 | 240 | 1 400 | 3 | 1 | B00 | 516 | 275 | 217 | 241 | 60,5 |
| | QV 240 140 B06 C | EURO | 12 | 240 | 1 400 | 4 | 1 | B00 | 516 | 275 | 217 | 241 | 60,5 |
| | QV 095 076 A41 C | ASIA | 12 | 95 | 760 | 0 | 1 | B00 | 409 | 170 | 221 | 234 | 24,8 |
| | QV 095 076 B41 C | ASIA | 12 | 95 | 760 | 1 | 1 | B00 | 409 | 170 | 221 | 234 | 24,8 |
| | QV 100 080 A41 C | ASIA | 12 | 100 | 800 | 0 | 1 | B00 | 409 | 170 | 221 | 234 | 25,5 |
| | QV 100 080 B41 C | ASIA | 12 | 100 | 800 | 1 | 1 | B00 | 409 | 170 | 221 | 234 | 25,5 |
| | QV 105 083 A41 C | ASIA | 12 | 105 | 830 | 0 | 1 | B00 | 409 | 170 | 221 | 234 | 26,6 |

| Type case | Code | Standard case | Voltage, V | Capacity (Ah) | CCA (EN), A | Layout | Terminal | Hold Down | Length (mm) | Width (mm) | Height (mm) | Total Height (mm) | Weight, kg |
|-----------|------------------|---------------|------------|---------------|-------------|--------|----------|-----------|-------------|------------|-------------|-------------------|------------|
| | QV 105 083 B41 C | ASIA | 12 | 105 | 830 | 1 | 1 | B00 | 409 | 170 | 221 | 234 | 26,6 |
| | QV 110 087 A41 C | ASIA | 12 | 110 | 870 | 0 | 1 | B00 | 409 | 170 | 221 | 234 | 26,9 |
| | QV 110 087 B41 C | ASIA | 12 | 110 | 870 | 1 | 1 | B00 | 409 | 170 | 221 | 234 | 26,9 |
| | QV 115 090 A41 C | ASIA | 12 | 115 | 900 | 0 | 1 | B00 | 409 | 170 | 221 | 234 | 27,8 |
| | QV 115 090 B41 C | ASIA | 12 | 115 | 900 | 1 | 1 | B00 | 409 | 170 | 221 | 234 | 27,8 |
| | QV 120 100 A41 C | ASIA | 12 | 120 | 1 000 | 0 | 1 | B00 | 409 | 170 | 221 | 234 | 29,8 |
| | QV 120 100 B41 C | ASIA | 12 | 120 | 1 000 | 1 | B00 | 409 | 170 | 221 | 234 | 29,8 | |


POLARITY

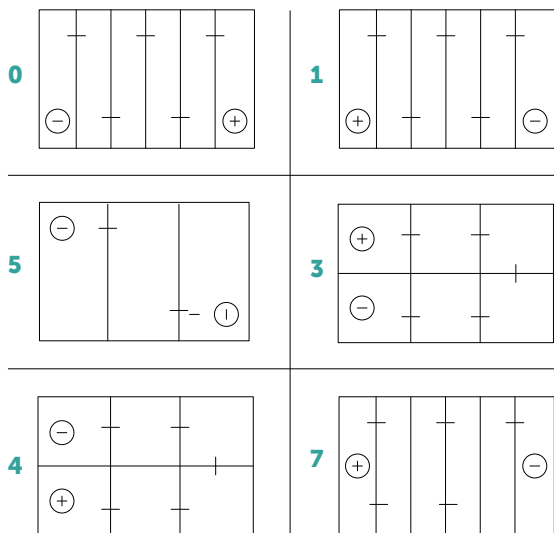

TERMINAL

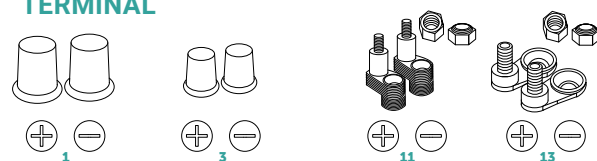

BOTTOM MOUNTING

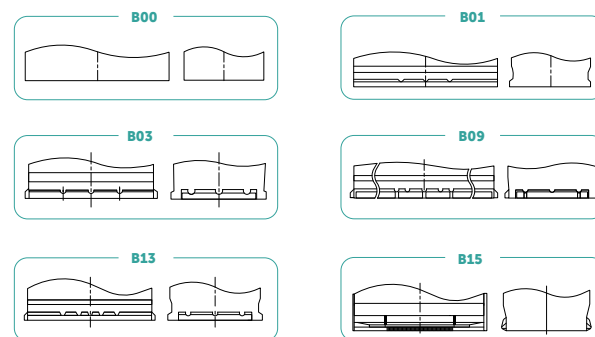



TOP QUALITY



GUARANTEED

ABSEL

PREMIUM BATTERIES

HEAD OFFICE



Jebel Ali Free Zone South, Dubai, UAE
+971 4 340 0336 | +971 50 896 0071
www.absel.com
info@absel.com

MANUFACTURING COORDINATION CENTER



No:19/6 Mahmutbey, Taşocağı Yolu, Entrance C1
Floor:17 Office:52, Bağcılar, 34218 Istanbul, Turkey
+90 539 926 93 36 | +90 212 924 40 50
info@absel.com

DISTRIBUTION NETWORK

EUROPE | EUROPEAN UNION, TURKEY



Max-Kaiser-Str. 60, 97424, Germany
+49 176 362 250 48
eu-sales@absel.com

LEARN MORE ABOUT
ABSEL BATTERIES



absel.com